


GLASSWASHER

G415

2



đ

C/III.

uie

11

100

ECOMAX PLUS G415 GLASSWASHER



The compact glasswasher for hotels, bars and restaurants, that are washing more than a hundred glasses a day.

Glasswasher ecomax plus G415

Cycle times*	60/120/180 sec.
Capacity per hour*	up to 60 racks (900 glasses)
Wash/rinse temperature	approx 55° C / approx 65°C
Tank capacity	81
Fresh water consumption/rack	2.0 l
Wash pump	0.4 kW
Heating booster/tank	2.8 (4.2**) kW / 0.8 kW
Total loading	3.2 (5.4**) kW
Rated voltage	230V/50hz/1 (400V/50hz/3)
Width/Depth/Height	460/590/705 mm
Loading height	315 mm
Rack size	400 x 400 mm

*hot water connection **with 400V/50Hz/3/N

Line pressure required: 0.8 to 6 bar


PRODUCT ADVANTAGES

- Electronic control with digital temperature indication
- Flat surface of control panel
- 3 selectable wash cycles
- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Indented nozzles prevent blocking
- Thermostop-function for guaranteed rinse temperatures
- Integrated self-cleaning cycle
- Stainless steel rinse arm and housing
- Removal of rinse arms without any tools
- Easy access to all parts
- Deep-drawn wash tank
- Double-walled housing and heat insulated front door
- Tank strainer, coarse filter and pump suction casing
- Door damping control
- Loading height above average: 315 mm, for easy loading of extra high glasses
- Fully equipped with detergent and rinse aid dispenser, rinse pressure pump and drain pump

plus

STANDARD EQUIPMENT

- Universal flat rack 371450-83
- Glass rack with 4 sloped rows 371450-84
- Heater with thermostat control
- Electric cable, flexible water supply hose and drain hose
- Rear panelling

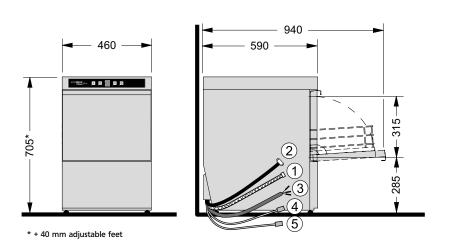

- ① Drain hose
- ② Supply hose
- ③ Connection cable
- (4) Liquid detergent a)
- ⑤ Rinse aid a)

A registered trademark of HOBART GmbH \cdot Member of the ITW Food Equipment Group Europe

Robert-Bosch-Straße 17 · 77656 Offenburg/GERMANY · info@ecomaxbyhobart.com · Phone +49 781 600-2820 · Fax +49 781 600-2819 · www.ecomaxbyHOBART.com

^{a)} for machines with external containers